


High Speed Pre-made Pouch Filler / Sealer

TT-8DW-N



- Widely flexible for various pouch formats and product types.
- Designed for safe and sanitary operation.
- Easy cleaning, washdown design.
- Simple, intuitive operation and maintenance using touch screen controls.
- Optional zipper opening, nitrogen gas flush, liquid filling systems and other features.

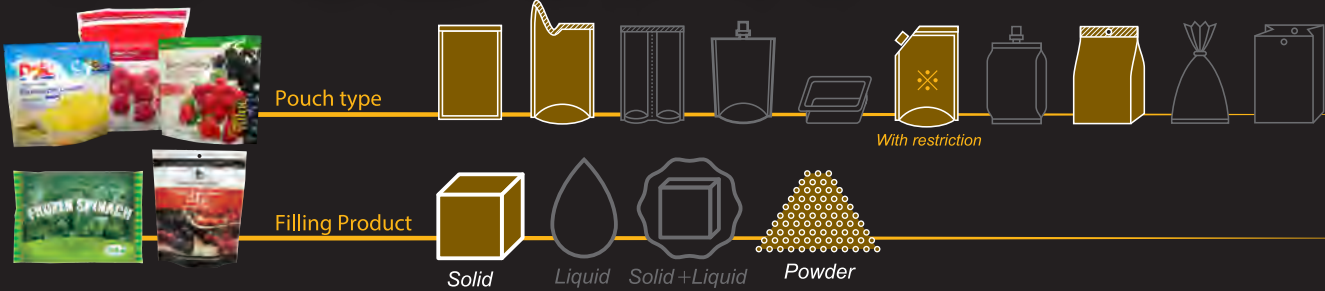

Wet Use




Stations



Duplex




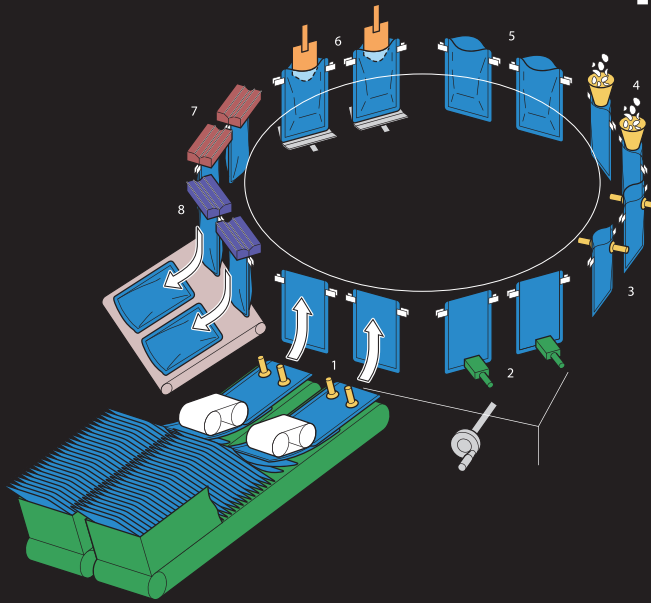


Machine functions

1st station	Pouch Infeed
2nd station	Printing
3rd station	Pouch opening
4th station	Product filling
5th station	-----
6th station	N2 gas flush (Option)
7th station	Heat sealing
8th station	Cooling、 Product discharge

Machine Dimensions

* Specifications & dimensions subject to change without notice

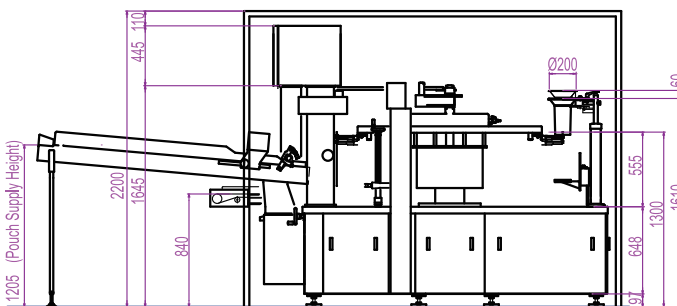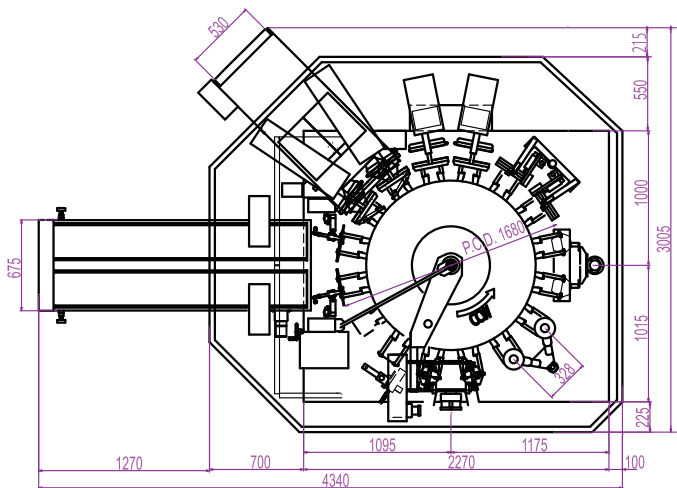

Machine Specifications

* Depending on product

Capacity	max. 80 ppm
Pouch Size	W: 120 - 260 mm L: 130 - 400 mm
Pouch Material	Various laminated pouches, PE pouch
Pouch Style	Flat, standup & floating gusset. Optional ptc zipper style.
Sealing Method	2-stage heat/cool sealing method
Electric Power	9.0 kVA
Air Consumption	0.6 MPa (72psi), 900 L/min(ANR)
Machine Dimension & Weight	W 4,340 x L 3,005 x H 2,200 mm 3,500Kg
Accessories	Product feeding hopper, Product discharge conveyor Pouch opening following guide, Product counter, Heater disconnection alarm Pouch opening detection device
Options	Date printer, Air squeeze device, Tapping Stand-up pouch bottom opening device N2 Gas flush device, Zip open-close device Fill pause mode, Seal area cleaning, Pouch recycle, Double pouch detection, Various filling devices, Pouch pick-up position detection, Product in seal detection

Applications

Frozen foods, Seafood, Snacks, Rice & other grains, Noodles, Pet foods, Granular & powder products and others